


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
1K	2	C	ECR-13-001944	27FEB2013	LD JS

FINISHED CABLE DATA		
CONDUCTORS	WIRE AWG	23 AWG Solid
	Ø RANGE in mm	0,546 ≤ Ø < 0,610
	MATERIAL	COPPER
	PLATING	BARE
ELONGATION	15% PER EN 50288-1	
INSULATION	MATERIAL	POLYETHYLENE
	OVERALL DIAMETER	1,35
DRAIN WIRE	Ø RANGE in mm	0,40 ≤ Ø < 0,55
	MATERIAL	COPPER
	PLATING	TINNED
	ELONGATION	15% PER EN 50288-1
BINDER	POLYESTER TAPE	OPTIONAL
INDIVIDUAL PAIR SCREEN	MATERIAL	PLASTIC LAMINATED ALUMINUM FOIL
OVERALL SHIELD	FOIL MATERIAL	PLASTIC LAMINATED ALUMINUM FOIL
OVERALL SHIELD	BRAID MATERIAL	-
	PLATING	-
	COVERAGE	-
	ELONGATION	-
JACKET	MATERIAL	LSZH
	OVERALL DIAMETER (D x W)	7,2 x 15,0 mm
PULLING FORCE	MAX.	200 N

- REFER TO PRODUCT SPEC 108-93018 FOR ADDITIONAL REQUIREMENTS.
- BASENR SPECIFIC PRINT LEGEND INFO:
CAT7 F/FTP XG SOLID PR04X2 AWG23 LSZH
- CABLE COLORED TYPES UPON REQUEST.

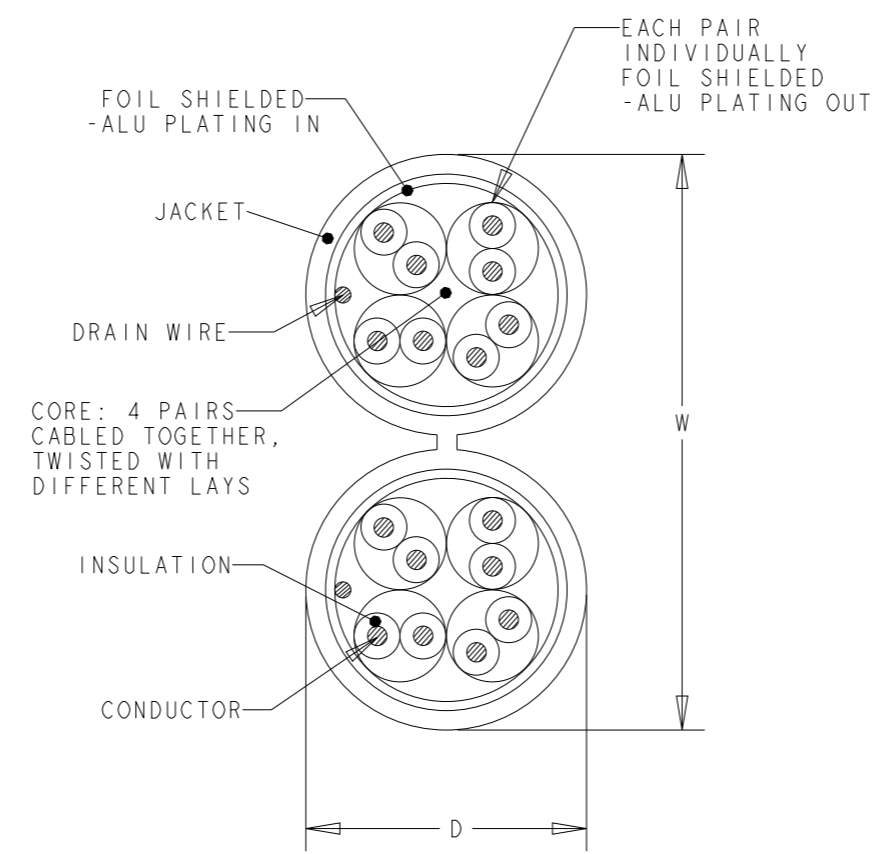

WHITE	500	REEL	1711195-1
COLOUR	LENGTH (METRES)	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	27FEB2013
DIMENSIONS: mm		CHK	27FEB2013
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	27FEB2013
0 PLC	±-	J. Sanabra	
1 PLC	±-	PRODUCT SPEC	
2 PLC	±-	APPLICATION SPEC	
3 PLC	±-	WEIGHT	
4 PLC	±-	CUSTOMER DRAWING	
ANGLES	±-	SCALE NTS	
FINISH	-	SHEET 1 OF 1	

TE TE Connectivity			
NAME CABLE, CAT7, F/FTP PiMF600 COMPACT, SOLID, PR04X2, AWG23, LSZH			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	-	©-1711195	-
SCALE NTS		SHEET 1 OF 1	REV C