


Use the same cable sheath diameters for primary and secondary sides.

Wire stripping:  
Sheath = 1.0 cm [ A ]  
Conductors = 0.6 cm [ B ]



Wiring with dimmer | Verdrahtung mit Dimmer

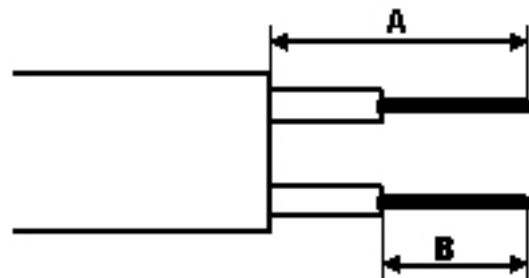